


- Industry's first crystal temperature test system with 100% electronic switching
- Proprietary 50 ohm reflection network provides typical frequency measurement repeatability 10 ppb !
- Chamber holds eight 64-position pallet socket DUT PCBs for a total of 512 parts
- RTD sensor mounted on DUT PCB for precision temperature measurement
- Crystals of different frequencies can be tested in a single temperature run
- Parameter and curve fit characteristics are checked against easy to define QC limits
- Data can be exported to *Microsoft Excel*™ for custom data analysis
- Thermistor-crystal testing for GPS application :
 - Residual frequency stability slope RFSS (ppb/°C)
 - 5°C small orbit hysteresis 1 RFHS (ppb/°C)
 - 5°C small orbit hysteresis 2 HSO (ppb pk-pk)

Extremely high speed, high precision frequency measurement using calculated FL over temperature, measures 512 parts in ≤ 30 seconds



64 Position
Pallet



64 Position
Pallet Socket
DUT PCB

SPECIFICATIONS

250B-2 Frequency Range:
250C-2 Frequency Range:
Frequency Correlation:
Frequency Repeatability:
Temperature Stability:
Temperature Range:

1 MHz to 220 MHz
1 MHz to 420 MHz
 ± 1 ppm* at series (typical)
10 ppb (typical)
 $\pm 0.1^\circ$ C
-55° C to 125° C (MR)
-65° C to 125° C (MR with LN₂ Boost)

* Proprietary measurement and calibration algorithms provide correlation to industry standard crystal measurement equipment.

The Roditi International Corporation Ltd

180 King's Cross Road, London WC1X 9DE, United Kingdom



Tel: +44 20 7819 8080 Fax: +44 20 7730 4131 Email: saunders@roditi.com Web: <https://roditi.com>

SYSTEM CONFIGURATION

- S&A 250B-2 or 250C-2 Network Analyzer with OCXO Option
- S&A 4350MR Option 1 Temperature Test Chamber
- Eight position card cage and backplane PCB

- 50 Ohm Reflection Networks
- Windows® based System Software
- System Controller
- Printer (Optional)

SAMPLE REPORTS

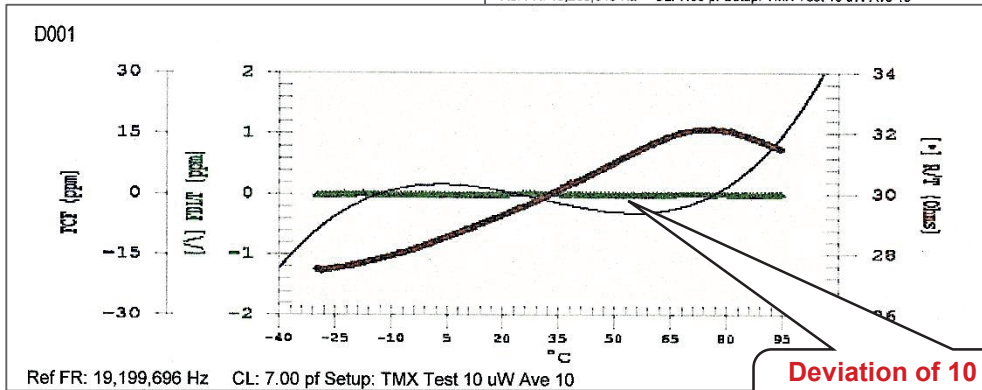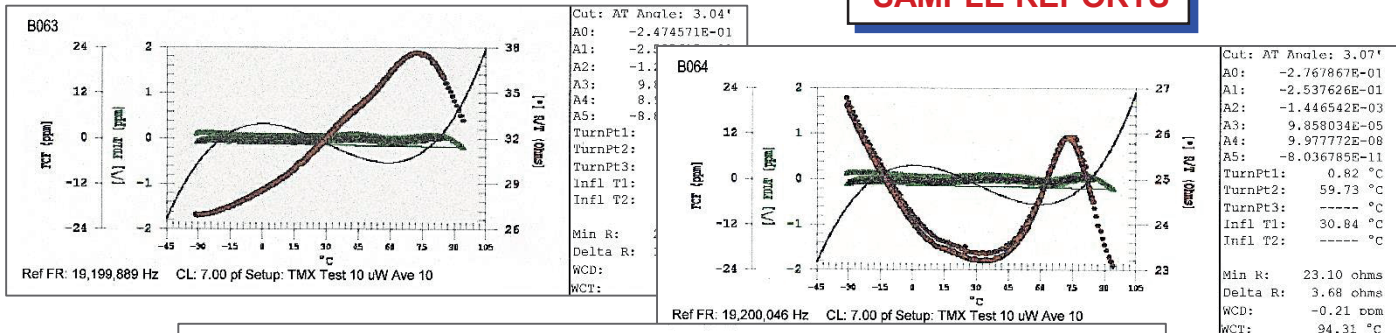

Deviation of 10 ppb from curvefit shows the system's excellent measurement repeatability

Start: D001 Stop: D064

Setup: TMX Test 10 uW Ave 10

Reference F: 19,200,000 Hz CL: 7.00 pF Power: 10.00 uW into 40.00 Ohms

Measurement to locate resonance or micro-jumps

Measurement to locate small orbit hysteresis 1

Measurement to locate small orbit hysteresis 2

	L mH	TS ppm/pF	PWR uW	RFSS ppb/°C	RFSST °C	RFHS ppb/°C	RFHST °C	HSO ppb	HSOT °C	
D001	99.162	-154.493	19,197,034	-20.32	19,199,610	1.92	29.63	113	2.47	
	27.83	15.5	10	-11.75	-21.51	-26.6	76.11	42.4	32.09	
D002	99.162	-154.112	19,197,041	-23.45	19,199,550	2.00	24.05	141	2.44	
	28.17	15.1	10	11.65	6.32	-23.4	76.11	43.2	-23.09	
D003	99.162	-153.494	19,197,053	-21.55	19,199,586	1.97	25.52	133	2.45	
	28.10	15.2	10	-11.19	-21.51	-23.1	76.85	54.1	-23.09	

The Roditi International Corporation Ltd is the exclusive European representative of Saunders & Associates, LLC